


Technische Daten

Component	HI-END LED COAX
Size mm (in.)	165 (6.5)
Power Handling - Continuous W	75
Power Handling - Peak W	150
Impedance Ohm	4
Depth mm (in.)	95,6 (3.76)
Tweeter diaphragm mm (in.)	36 (1.4)
Woofer Voice Coil Ø mm (in.)	25 (1)
Tweeter Voice Coil Ø mm (in.)	20 (0.8)
Frequency Response Hz	50 ÷ 25k
Woofer Magnet size D x d x h mm (in.)	78,5 x 32 x 17 (3.09 x 1.26 x 0.67)
Tweeter Magnet size D x h mm (in.)	19,7 x 3 (0.78 x 0.12)
Weight of one speaker kg (lb.)	1 (2.2)
Woofer Magnet	High density flux ferrite
Tweeter Magnet	Neodymium
Cone	Polypropylene with UV inhibitors
Dome	PEI
Xmech mm (in.)	±6,65 (0.26)

Elektro-Akustische Spezifikationen

D mm	125
Re Ohm	3,5
Fs Hz	65
Le mH	0,53
Vas l	8,8
Mms g	14
Cms mm/N	0,4
BL T*m	5,2
Qts	0,7
Qes	0,75
Qms	11,5
Spl dB	89

Physikalische Spezifikationen

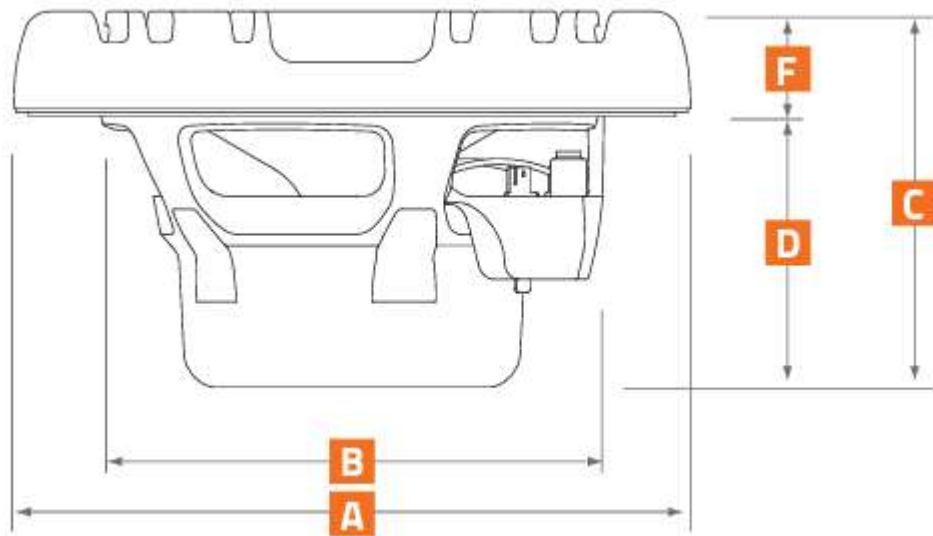

A	172,2 mm	6.78 in.
B	128 mm	5.04 in.
C	95,6 mm	3.76 in.
D	69 mm	2.72 in.
F	26,6 mm	1.05 in.

Frequenzgang

