
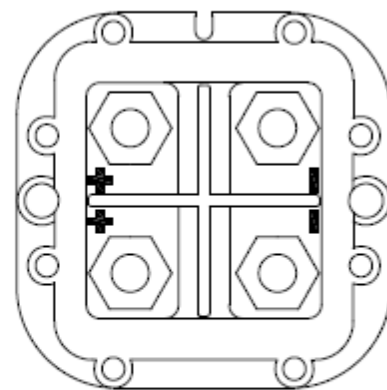


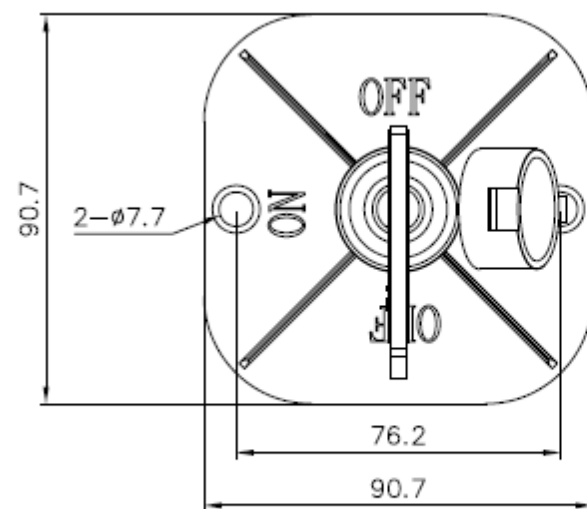

(+ , +) ON (- , -)

OFF

OFF

Max Voltage Range	Max 48VDC
Duty Continuous Rating	300Amps
Intermittent Rating	1,000Amps/10 seconds
Operating Temperature Range	From -40°C to 85°C
Advised Wire Size Max.	50 sq. mm
IP standard	Meet IP65 requirement

