


Technische Daten

Component	LED FLAT COMMON MOTOR TOWER
Size mm (in.)	200 (8)
Power Handling - Continuous W	200
Power Handling - Peak W	400
Impedance Ohm	4
Depth mm (in.)	288 (11.34)
Woofer Voice Coil Ø mm (in.)	51 (2)
Frequency Response Hz	45 ÷ 25k
Woofer Magnet size D x d x h mm (in.)	140 x 62 x 22 (5.5 x 2.4 x 0.87)
Weight of one speaker kg (lb.)	5.7 (12.6)
Woofer Magnet	High density flux ferrite common motor
Tweeter Magnet	High density flux ferrite common motor
Cone	Pressed paper water repellent
Dome	Polyamide
Xmech mm (in.)	8.3 (0.32)

Physikalische Spezifikationen

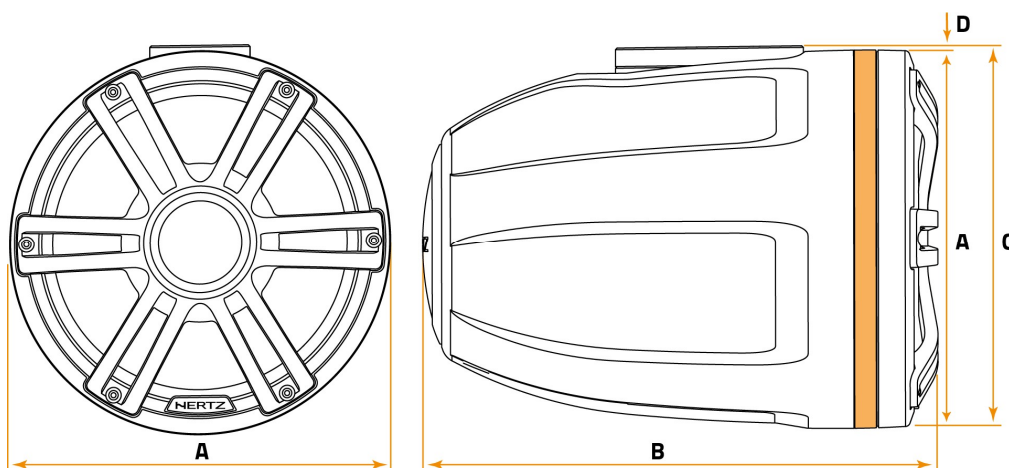

A	B	C	D	
225	308.2	231	6	mm
8.86	12.13	9.09	0.24	in.

Elektro-Akustische Spezifikationen

D mm	166
Re Ohm	3.3
Le mH	0.28
Vas l	10
Mms g	20.5
Cms mm/N	0.15
BL T*m	9
Spl dB	98

