

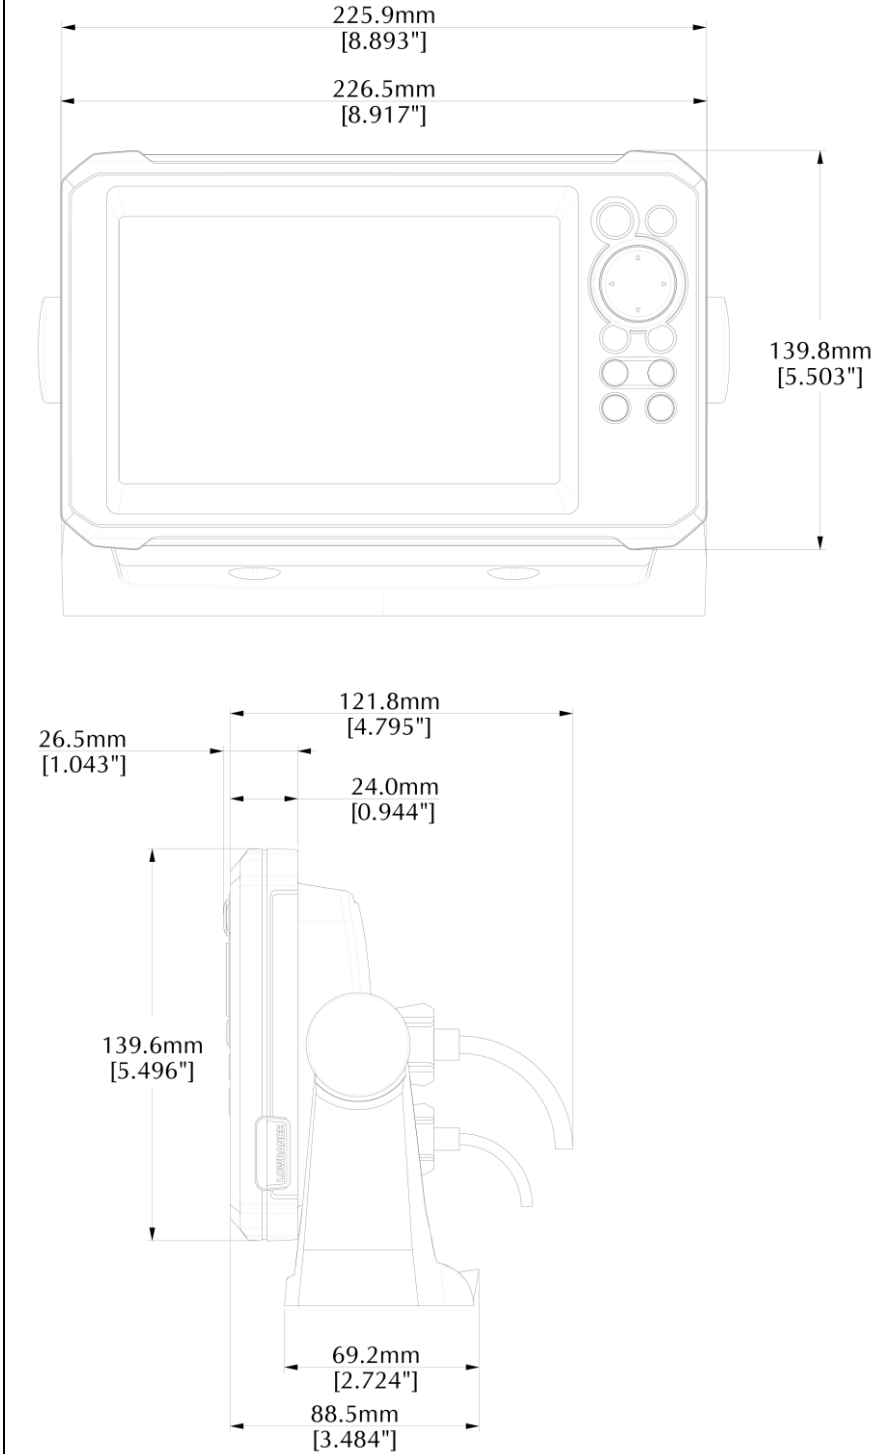
Technische Daten Lowrance Eagle 7

ANZEIGETYP	Anzeigegröße 7" IPS Anzeigeauflösung 800 x 480	Tastenfeld 9-way directional keypad, pages, waypoint, exit, enter, zoom, menu, power Ablesewinkel 85° top/bottom, 85° left/right
Sonar	Kompatibel mit Sonar Integrated: CHIRP, Broadband, DownScan Maximale Tiefe 200 kHz: 152m (500ft) DownScan: 91m (300ft) Max range SideScan: 183m (600ft) side-to-side	Sonarfrequenzen CHIRP* 200kHz (High) 83kHz (Medium) 50 kHz (Low) *depending on transducer DownScan 455 kHz (Low) 800 kHz (High) SideScan 455 kHz (Low) 800 kHz (High)
MULTIFUNKTION	Kartografie inklusive C-MAP® Inland Charts Kartographie unterstützt C-MAP® DISCOVER™ C-MAP® Genesis Live	Wegpunkte, Routen und Tracks 3000 waypoints 100 routes 100 trails GPS Aktualisierungsrate: SBAS Zeit bis zur ersten Korrektur: 45s
SCHNITTSTELLE UND KONNEKTIVITÄT	Sonar 1 port	SD- Kartenspeicher 1 slot (microSD) up to 32GB

Technische Daten Lowrance Eagle 7

Electrical	Versorgungsspannung 12 VDC Max. Stromverbrauch 550mA, 250mA at 12VDC (backlight full/off)	Empfohlener Sicherungswert 5A
ALLGEMEIN	Gewicht 0.67 kg (1.48 lbs)	Montagetyp Panel mount or bracket mount

Technische Daten Lowrance Eagle 7

	Abmessungen  Front view dimensions: - Top width: 225.9mm [8.893"] - Bottom width: 226.5mm [8.917"] - Height: 139.8mm [5.503"] Side view dimensions: - Top width: 121.8mm [4.795"] - Mounting bracket width: 26.5mm [1.043"] - Mounting bracket depth: 24.0mm [0.944"] - Height to top of screen: 139.6mm [5.496"] - Screen width: 69.2mm [2.724"] - Base width: 88.5mm [3.484"]	
UMWELT	Betriebstemperaturbereich -15°C to +55°C (5° F to 131° F) Lagertemperaturbereich -20°C to +60°C (4°F to 140°F)	Feuchtigkeit Damp heat 66°C (150°F) at 95% relative (48 hr) Waterproof rating

Technische Daten Lowrance Eagle 7

		IPX7 with card door closed
GARANTIE	Garantie- Zeitraum 1 year	